

Fullject **X-LINE**

PRO EDITION



 **veenHUIS**

Master your Manure



Mastered
together

Efficient manure application for optimal crop growth

As a contractor and livestock farmer, you need to be able to rely on your machines. In all circumstances. You want maximum performance to get the manure on the land at the right time. In addition, you want to deliver top quality, leading to maximum crop growth.

Listening to these insights, ideas and wishes and combining the strengths of both brands creates innovation you can build on.

The new Veenhuis Fullject X-line is designed to support you as a professional for a guaranteed great result. Today and tomorrow.





Fullject **X-LINE**

MASTERED TOGETHER

The right injector for every application

The new Veenhuis Fullject X-line is lower in weight, has wider working widths and is safe on the road with at least 35 cm ground clearance and a maximum of 4 metres transport height for all models.

Thanks to the unique X-line element attachment, this injector is even easier to maintain.


Designed for both grassland and arable land, the Fullject X-line, with its powerful design, is a machine to be proud of.



New elements with unique X-line attachment

An important innovation in the Veenhuis Fullject X-line is the element developed further from the Veenhuis Premiumject which guarantees optimum ground adaptation. The open construction makes the elements easy to clean and accessible for maintenance.

The Fullject X-line also owes its name to the new X-line element attachment; a unique low-maintenance attachment cross. This cross ensures lower service requirements and easy maintenance as the cross is lubrication-free. The cross attachment also ensures optimal force induction from the element to the main frame.

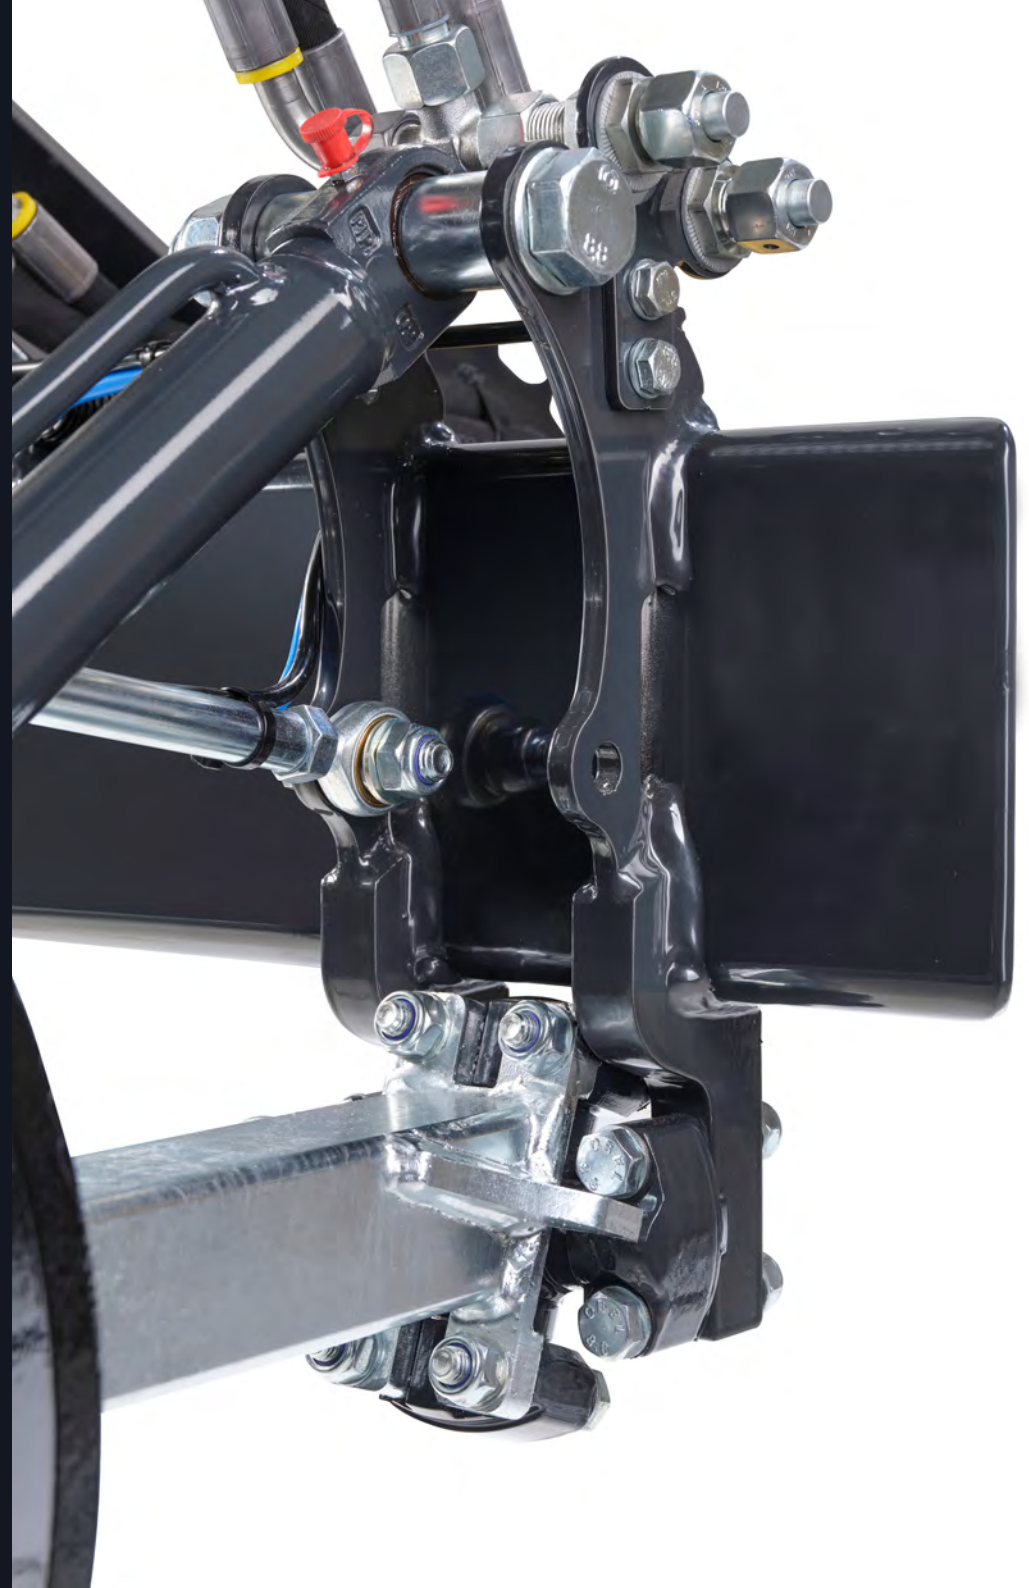


Lightweight concept for optimum comfort

Thanks to its clever construction, the Veenhuis Fullject X-line is one of the lightest injectors in its class.

Thanks to this lightweight concept, the user experiences optimum comfort and safety while driving. Even when the tank is empty, it drives comfortably in the field and on the road, due to the better weight distribution of the whole combination.

The lightweight concept also reduces fuel consumption, minimises ground pressure and makes it smoother and easier to fold and unfold the injector.

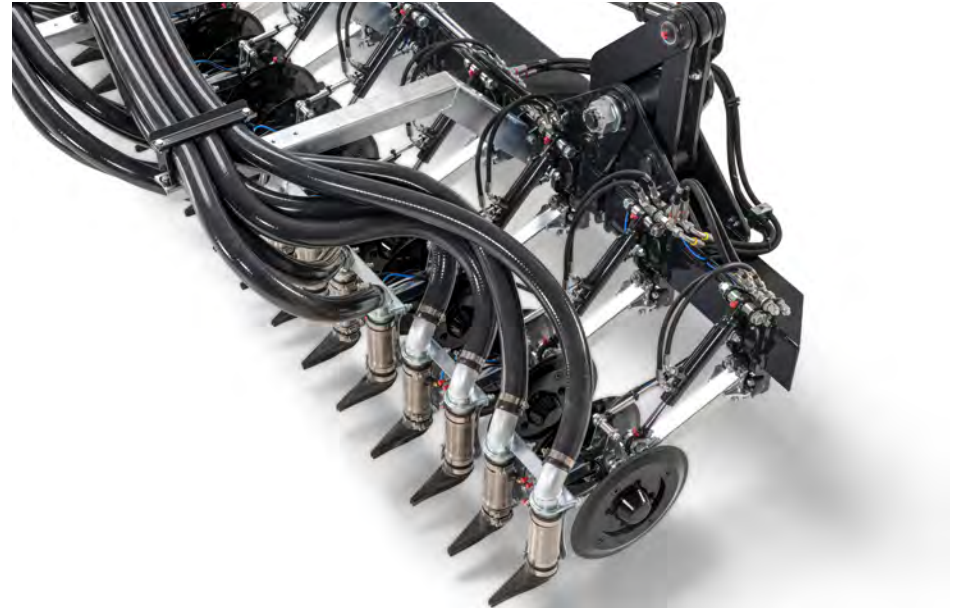



Mastered
together



Perfect end result through proven technology

Also thanks to the further developed Schuitemaker Hydrocare pendulum system based on the Schuitemaker Exacta, the working depth is the same across the entire working width regardless of the unevenness of the terrain.

By retracting the elements when lifting the machine, a large ground clearance is created. In addition, the elements are co-steering, eliminating lateral forces. Thanks to the unique CleanFlow outlet rubber, the manure is dosed splash-free into the slit for a clean and optimal end result.



Comfortable on the road thanks to compact transport dimensions

Sufficient ground clearance (min. 35 cm) in combination with a maximum transport height of 4 metres ensures that, as an operator, you are always safe and comfortable on the road.

To ensure the right transport dimensions, the injectors up to 9.0 metres are equipped with a 3-piece folding main frame. The 9.75 and 10.5 metres are equipped with a 5-piece folding main frame that folds in and out at a similar speed as the 3-piece variant.

When folding, the elements are hydraulically retracted, creating greater ground clearance and making the injector even more compact in transport position.



Maintenance- friendly thanks to sustainable concept

The Veenhuis Fullject X-line is easier to maintain thanks to the unique X-line technology and the open construction of the elements in addition, the injector is wear-resistant thanks to 40% fewer wear parts and 33% fewer lubrication points.

In addition, Veenhuis has achieved an 80% saving on zinc in the new design, without losing corrosion resistance thanks to the unique MicroZINQ® concept. The premium injector for now and the future.



Perfect distribution and cutting to avoid downtime

The better the distribution and cutting of the manure, the more accurate the fertilisation of the land. The Fullject X-line is equipped with a Veenhuis SplitFlow cutting distributor that ensures optimal flow. Damage due to mixing oil and manure is prevented by the robust drive of the cutting distributor with its double seal.

The manure is distributed evenly across the entire width of the machine and, thanks to the cutting action, blockages are kept to a minimum. The removable cutting blades ensure good distribution at all manure thicknesses and doses.



The right amount of manure in the right place

The Veenhuis Fullject X-line is ideally suited for precision fertilization.

As standard, the Fullject X-line is fitted with pneumatic foot valves, whereby the injector can optionally be closed per two elements (75 cm).

This makes it possible to divide the working width into more sections and those sections can be switched automatically via GPS/RTK. When a task map is read in beforehand, precise customised fertilisation can be achieved.



Technical specifications

		Fullject X-line (Pro)						
Working width	m	6.00	6.75	7.50	8.25	9.00	9.75	10.5
Number of outlets	#	32	36	40	44	48	52	56
Type of cutting distributor	#-holes	40	40	40	56	56	56	56
Hose diameter	mm	50	50	50	50	50	50	50
Transport height*	cm	240	245	282	320	357	366	366
Transport width	cm	300	300	300	300	300	300	300
Weight	kg	1.900	2.050	2.200	2.400	2.600	3.300	3.500
Frame construction	#-parts	3	3	3	3	3	5	5
Disc diameter	cm	35	35	35	35	35	35	35
Distance between discs	cm	18,75	18,75	18,75	18,75	18,75	18,75	18,75
Steps with platform		●	●	●	●	●	●	●
Quick coupling system		O	O	O	O	O	O	O
Multifaster		O	O	O	O	O	O	O
Manual section control		O	O	O	O	O	O	O
Pneumatic shut-off valves		●	●	●	●	●	●	●
(Automatic) section control via GPS/RTK		O	O	O	O	O	O	O
Automatic grease lubrication		O	O	O	O	O	O	O

*Transport heights are measured from the ground

All Fullject X-line injectors are compatible with the various self-propelled tanks

Explanation of symbols: ● = Standard O = Optional - = Not available

All data has been compiled with the greatest possible care, but are non-binding. Changes in construction/design are always possible.



Morsweg 18
7461 AG Rijssen - NL

T +31 (0) 548 - 51 41 25
E info@svgroun.nl

veenhuiss.com • svgroun.nl



Schuitemaker  **veenHUIS**